


Cirrus 5N

Five-brush rollover car wash

The vehicle stays still and the machine travels over it on floor rails. Four upright brushes and one horizontal brush, each driven independently, under PLC computer control.

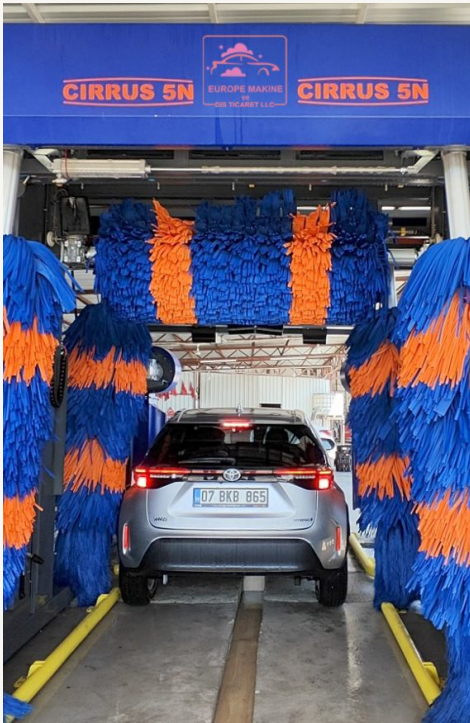

250 / 300 cm

Washing height

24-32 veh/hr

Wash only

Specification

Measurement	Unit	5N 250	5N DR250	5N 300	5N DR300
Maximum machine width	cm	375	375	375	375
Maximum machine height	cm	350	400	350	400
Maximum washing height	cm	250	250	300	300
Maximum washing width	cm	220	220	220	220
Rail gauge	cm	300	300	300	300
Rail length	m	10	10	10	10
Power installed	kW	5.5	26	5.5	26
Voltage / frequency	V / Hz	380 / 50	380 / 50	380 / 50	380 / 50
Operation time per vehicle	min	2 – 4.5	2 – 6	2 – 4.5	2 – 6
Water pressure	bar	3.5	3.5	3.5	3.5
Water requirement	lt/min	60 – 80	60 – 80	60 – 80	60 – 80
Air pressure	bar	6	6	6	6
Air requirement	lt/min	45	56	45	56
Electricity	kWh/vehicle	0.20	0.45	0.20	0.45
Shampoo	gr/vehicle	10 – 20	20	10 – 20	10 – 20
Wax	gr/vehicle	–	20	–	20

Brush units, vertical / horizontal

4 + 1

4 + 1

4 + 1

4 + 1

Supplied with the machine: door to door shipping, installation, and six months warranty. Send us the site and the vehicles you expect to wash and we will return a proforma quotation at no charge.

Email

sales@europemakine.com

Telephone

+1 561 825 7363